


# Monitoring Relays

## 1-Phase AC/DC Over Voltage - AC Over Current

### Types DUA01, PUA01

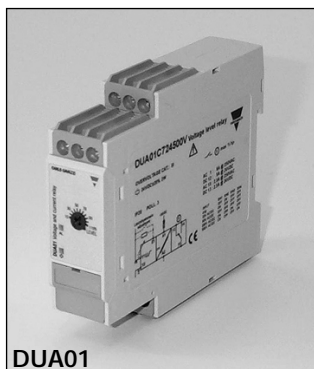

DUA01



PUA01


- AC/DC over voltage monitoring relay
- Selection of measuring range by DIP-switches
- Measuring ranges: 2 to 20 VAC/DC, 5 to 50 VAC/DC, 20 to 200 VAC/DC, 50 to 500 VAC/DC, 0.4 to 4 V<sub>p</sub> AC
- Adjustable voltage limit on relative scale
- Adjustable hysteresis
- Programmable latching at set level
- Output: 8 A SPDT relay normally de-energized
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DUA01) or plug-in module (PUA01)
- 22.5 mm Euronorm housing (DUA01) or 36 mm plug-in module (PUA01)
- LED indication for relay and power supply ON
- Galvanically separated power supply

### Product Description

DUA01 and PUA01 are precise AC/DC over voltage monitoring relays. They can also be used as 1-phase or 3-phase over current monitoring relays when connected with MI or MP current transformers.

Owing to the built-in latch function, the ON-position of the relay output can be maintained. The red LED indicates the alarm status.

### Ordering Key **DUA 01 C B23 500V**

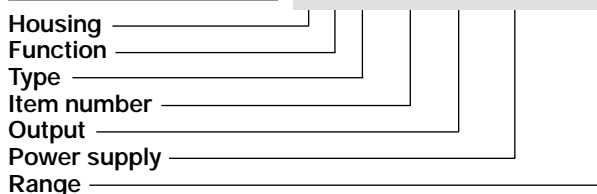

### Type Selection

Mounting	Output	Supply: 24 VDC	Supply: 48 VDC	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	<b>DUA 01 C 724 500V</b>	<b>DUA 01 C 748 500V</b>	<b>DUA 01 C B48 500V</b>	<b>DUA 01 C B23 500V</b>
Plug-in	SPDT	<b>PUA 01 C 724 500V</b>	<b>PUA 01 C 748 500V</b>	<b>PUA 01 C B48 500V</b>	<b>PUA 01 C B23 500V</b>

### Input Specifications

<b>Input (voltage level)</b>	DUA01: Terminals Y1, Y2 PUA01: Terminals 5, 7	
<b>Measuring ranges</b>	<b>Int. resist.</b>	<b>Max. volt.</b>
Direct		
Selectable by DIP-switches		
2 to 20 VAC/DC	> 500 kΩ	600 V
5 to 50 VAC/DC	> 500 kΩ	600 V
20 to 200 VAC/DC	> 500 kΩ	600 V
50 to 500 VAC/DC	> 500 kΩ	600 V
0.4 to 4 V <sub>p</sub> AC	> 500 kΩ	600 V
MI and MP CT ranges	<b>AAC rms</b>	<b>Max. curr.</b>
1-ph.: 3-ph.:		
MI 5 MP 3005	0.5 to 5 A	20 AAC
MI 20 MP 3020	2 to 20 A	50 AAC
MI 100 MP 3100	10 to 100 A	250 AAC
MI 500 MP 3500	50 to 500 A	750 AAC
<b>Note:</b>	The input voltage cannot raise over 300 VAC/DC with respect to ground (PUA01 only)	
<b>Contact input</b>	Terminals Z1, Y1 Terminals 8, 9	
DUA01	> 10 kΩ	
PUA01	< 500 Ω	
Disabled	> 500 ms	
Enabled		
Latch disable		

### Output Specifications

<b>Output</b>	SPDT relay
Rated insulation voltage	250 VAC
<b>Contact ratings (AgSnO<sub>2</sub>)</b>	μ
Resistive loads AC 1	8 A @ 250 VAC
DC 12	5 A @ 24 VDC
Small inductive loads AC 15	2.5 A @ 250 VAC
DC 13	2.5 A @ 24 VDC
<b>Mechanical life</b>	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	≥ 10 <sup>5</sup> operations (at 8 A, 250 V, cos φ = 1)
<b>Operating frequency</b>	≤ 7200 operations/h
<b>Dielectric strength</b>	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)



## Supply Specifications

<b>Power supply</b> Rated operational voltage through terminals: A1, A2 or A3, A2 (DUA01) 2, 10 or 11, 10 (PUA01) 724: 748: B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038)  24 VDC ± 20%, insulated 48 VDC ± 20%, insulated 24/48 VAC ± 15% 45 to 65 Hz, insulated 115/230 VAC ± 15% 45 to 65 Hz, insulated
<b>Dielectric voltage</b> Supply to input Supply to output Input to output	<b>DC supply</b> 2 kV 4 kV 4 kV <b>AC supply</b> 4 kV 4 kV 4 kV
<b>Rated operational power</b> AC DC	4 VA 2 W

## General Specifications

<b>Reaction time</b> Alarm ON delay  Alarm OFF delay	< 100 ms (voltage rising from -20% to +20% set value) < 300 ms (voltage decreasing from +20% to -20% set value)
<b>Accuracy</b> Temperature drift Repeatability	(15 min warm-up time) ± 1000 ppm/°C ± 0.5% on full-scale
<b>Indication for</b> Power supply ON Output relay ON	LED, green LED, red
<b>Environment</b> Degree of protection Pollution degree Operating temperature Storage temperature	(EN 60529) IP 20 3 (DUA01), 2 (PUA01) -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%
<b>Housing dimensions</b> DIN-rail version Plug-in version	22.5 x 80 x 99.5 mm 36 x 80 x 87 mm
<b>Weight</b>	Approx. 150 g
<b>Screw terminals</b> Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Approvals</b>	UL, CSA (except 748)
<b>CE Marking</b>	Yes
<b>EMC</b> Immunity Emission	Electromagnetic Compatibility According to EN 61000-6-2 According to EN 50081-1

## Mode of Operation

DUA01 and PUA01 monitor both AC and DC over voltage. When connected with MI or MP current transformer (using the 0.4 - 4 V<sub>p</sub> range) they can monitor 1-phase or 3-phase AC currents up to 500 A.

**Example 1**  
(connection between terminals Z1, Y1 or 8, 9 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds the set level. Provided that the voltage has dropped min. 4% below the set point (see hysteresis), the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted or the power supply is interrupted as well.

**Example 2 (MI CT)**  
(no connection between terminals Z1, Y1 or 8, 9)


The relay operates when the current flowing through the CT exceeds the set level. It releases when the current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

**Example 3 (MP CT)**  
(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the maximum current flowing through the CT exceeds the set level. It releases when the maximum current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

## Range - Level Setting

Adjust the measuring range setting the DIP switches 1 to 4 as shown below. To access the DIP switches open the grey plastic cover using a screwdriver as shown below.





ON ← 1 2 3 4	<b>Measuring range</b> OFF ON OFF OFF 0.4 to 4 V <sub>p</sub> ON OFF OFF OFF 2 to 20 VAC/DC OFF OFF OFF OFF 5 to 50 VAC/DC ON OFF ON OFF 20 to 200 VAC/DC ON OFF OFF ON 50 to 500 VAC/DC
--------------------------	---

**Centre knob:**  
Setting of voltage on relative scale: from 10 to 110% of the full-scale value.

**Hysteresis:**  
Approx. 4% of set value, it can be extended by inserting a resistor between terminals Z1, Y1 or 8, 9.

**Approx. resistor values:**  
10%: 180 kΩ  
25%: 47 kΩ  
50%: 22 kΩ  
75%: 15 kΩ  
Latch: < 500 Ω

## Operation Diagrams

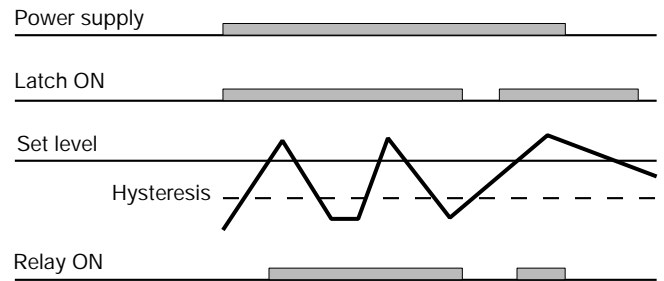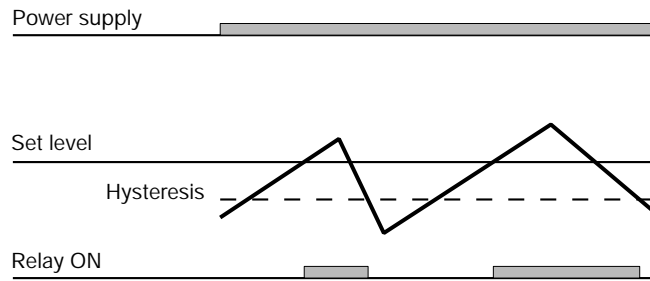

## Wiring Diagrams

