


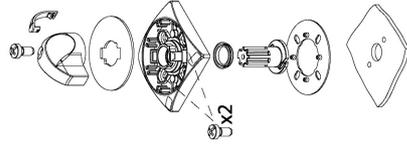




YNU74
YNU74





YNU76
YNU76



YNU77
YNU77



YNU77
YNU77




CEI EN 60947-3



YNGT4
YNGY4




YNGT6
YNGY6




YNGK6
YNGL6



L=(mm)	53	53
	KNZ	XNA 16-32A XNF



KNZ...R 1




XNA...R 2
XNF...R


UL MARKING

- 1** Use Fuses only, break all lines and same polarity. Suitable for use on a circuit capable of delivering not more than 10 KA rms symmetrical amperes, 600Vac, when protected by class J or CC fuses of 30A. Use 75°C copper (Cu) conductor only and wires No. 10 AWG, stranded or solid.
- 2** Suitable for use on a circuit capable of delivering not more than 10 KA rms symmetrical amperes, 600Vac, when protected by listed cartridge fuses, nonrenewable (JDDZ) class J, time delay fuse. Use 60/75°C copper (Cu) conductor only and wire ranges No. 1-10 AWG, stranded or solid.

L=(mm)	62	62
	KNZ	XNA 16-32A XNF




KNZ...G 1




XNA...G 2
XNF...G


YNU4
YNUY4

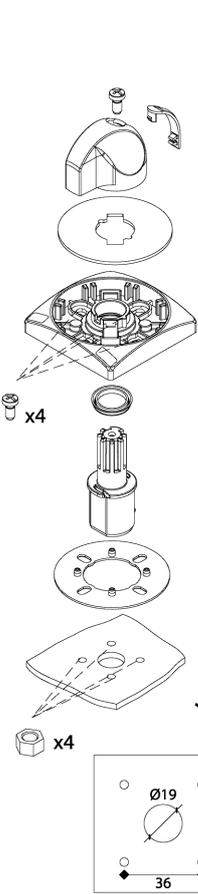


YNU6
YNUY6

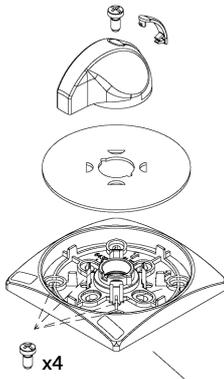


YNUK6
YNUY6

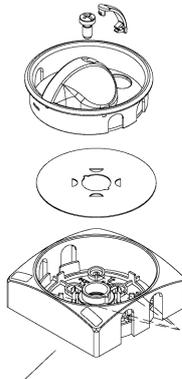




YNU7
YNUY7

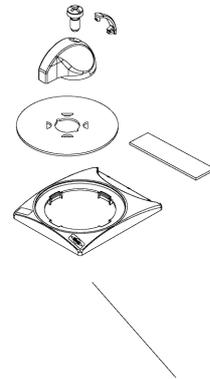

YNUK7
YNUY7



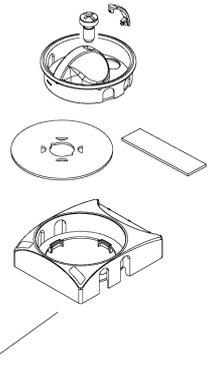


CEI EN 60947-3






L= (mm)	KNZ	XNA 16÷32A XNF	XNA 50÷100A
H=100mm	min	188	202
	max	198	212
H=150mm	min	238	252
	max	248	262
H=200mm	min	288	292
	max	298	302

L= (mm)	KNZ	XNA 16÷32A XNF	XNA 50÷100A
1	min	108	122
	max	118	132
2	min	133	147
	max	143	157
3	min	158	172
	max	168	182
max 4	min	183	197
	max	193	207

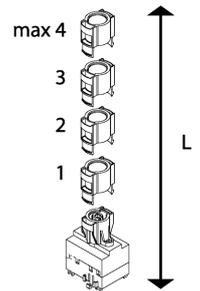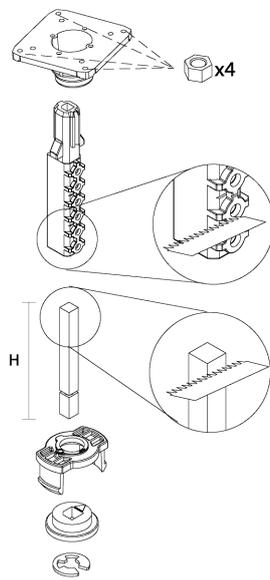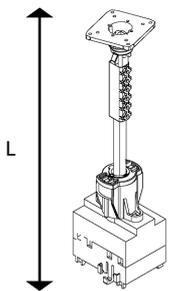

L= (mm)	KNZ	XNA 16÷32A XNF	XNA 50÷100A
min	83	83	97
max	93	93	107




UL MARKING

① Use Fuses only, break all lines and same polarity. Suitable for use on a circuit capable of delivering not more than 10 KA rms symmetrical amperes, 600Vac, when protected by class J or CC fuses of 30A. Use 75°C copper (Cu) conductor only and wires No. 10 AWG, stranded or solid.

② Suitable for use on a circuit capable of delivering not more than 10 KA rms symmetrical amperes, 600Vac, when protected by listed cartridge fuses, nonrenewable (JDDZ) class J, time delay fuse. Use 60/75°C copper (Cu) conductor only and wire ranges No. 1-10 AWG, stranded or solid.


...GK6
...GL6

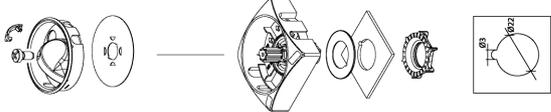


...GT6
...GV6



...GT4
...GY4

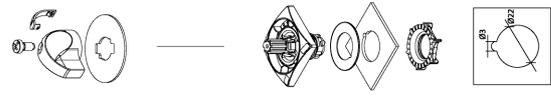


...BK7
...RL7

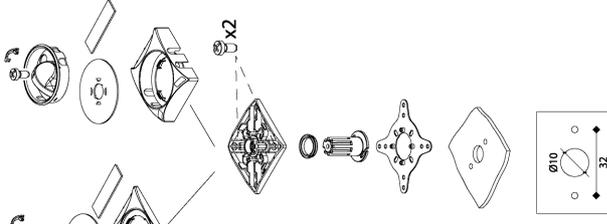

...RT7
...RY7




...RK6
...RL6

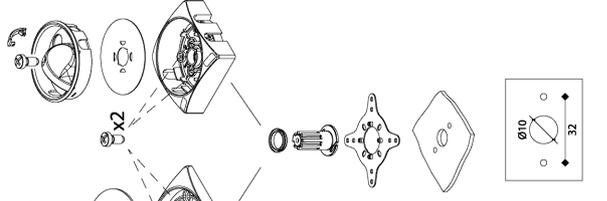


...RT6
...RY6



...BT4
...BY4

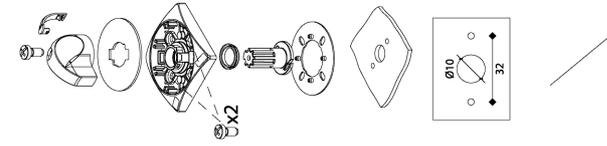


...BK7
...BL7

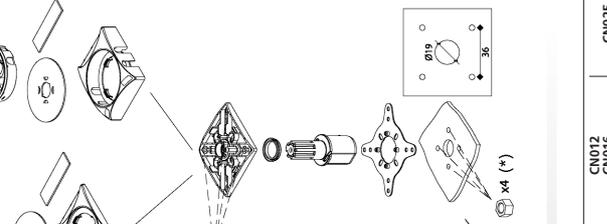

...BT7
...BY7




...BK6
...BL6

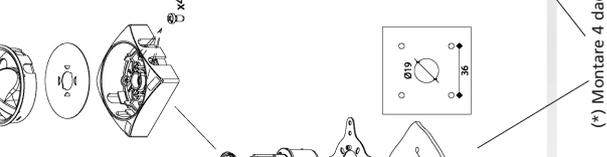

...BT6
...BY6



...BT4
...BY4

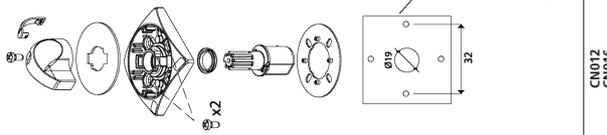

N°	CN012 CN016 CN020				CN025 CN032			
	L	1	2	3	1	2	3	+
1	MIN	101	113	125	107	123	139	16
	MAX	111	123	135	117	133	149	16
2	MIN	126	138	150	132	148	164	16
	MAX	136	148	160	142	158	174	16
3	MIN	151	163	175	157	173	189	16
	MAX	161	173	185	167	183	199	16
4	MIN	176	188	200	182	198	214	16
	MAX	186	198	210	192	208	224	16

L = mm

H	CN012 CN016 CN020				CN025 CN032			
	L	1	2	3	1	2	3	+
115	MIN	167	179	191	173	189	205	16
	MAX	244	256	268	250	266	282	16
165	MIN	244	256	268	300	316	332	16
	MAX	294	306	318	326	342	358	16
215	MIN	267	279	291	273	289	305	16
	MAX	344	356	368	350	366	382	16

H - L = mm

L = (mm)	CN012 CN016 CN020				CN025 CN032			
	1	2	3	+	1	2	3	+
min	76	89	100	+12	86	98	110	
max					86	98	110	
min					86	102	118	+16
max					95	112	128	

(*) Montare 4 dadi

(*)

(*)

(*)



(*)

(*)

L=(mm)	1	2	3	+
CN012				
CN016	47	59	71	12
CN020				
CN025				
CN032	53	69	85	+16

L=(mm)	1	2	3	+
CN012				
CN016	38	50	62	12
CN020				
CN025				
CN032	44	60	76	+16

L=(mm)	1	2	3	+
CN012				
CN016	38	50	62	12
CN020				
CN025				
CN032	44	60	76	+16

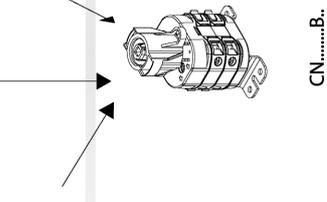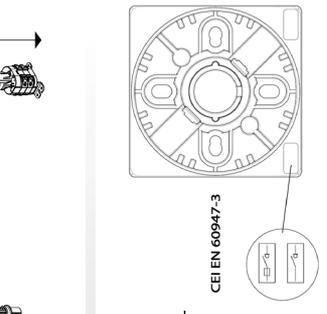

L = (mm)	1	2	3	+
CN012 min	76	89	100	+12
CN016 max				
CN020 max				
min				
max	86	102	118	+16
CN025 min				
CN032 max	95	112	128	

CN.....G.

CN.....R.

CN.....B.

UL MARKING
Break all lines and same polarity. Suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600Vac maximum, use fuses only. Minimum enclosure size: 215mm x 235mm x 85mm (W x H x D)

WIRE SIZE	
CN012 - CN016	CN020 16-10 AWG
CN025 - CN032	16-8 AWG

