



PD30 series - Photoelectric Sensors

Sensors

PD30 Series

Miniature photoelectric sensors

This new range of miniature high-performance sensors comes in three complete product lines: a PD30 STAINLESS STEEL family with IP69K and Ecolab certifications and superior durability, a cost-effective PD30 BASIC family with potentiometer adjustment and a refined PD30 ADVANCED family with teach-in function, dust warning, and options for muting and remote teaching.

The PD30 sensor family combines excellent sensing abilities with an optimized compact housing design. Featuring a size of only 10.8 x 20 x 30 mm, it follows international industry standards. In addition, the PD30 family covers a wide variety of sensing principles to fit requirements of virtually any application: diffuse-reflective, background suppression, retro-reflective with or without polarization, even for transparent objects, as well as through-beam. These PD30 sensors are eminently suited for applications where space saving and high accuracy in detection are of vital importance.



Full range of PD30 sensors

World-class housing design

The compact and robust sensor housing in ABS-PMMA offers a high level of water and dust protection (IP 67). The Stainless steel version is IP69K and Ecolab certified.

High EMC performance

The microprocessor technology and the compact design ensure excellent EMC performance.

Environmentally friendly

This lead-free sensor is designed according to the RoHS directive. The highly advanced microprocessor design optimizes power consumption, allowing a 20% energy reduction compared to other sensors.

Simplified setup

Distance and sensing functions are easily set via the teach button or the remote teach wire on the PD30 ADVANCED sensors and via the freely adjustable potentiometer on the PD30 BASIC sensors and the PD30 Stainless steel sensors.

Space optimization

Despite its small size, PD30 offers the longest sensing range, managing distances formerly reached only by larger sensors.

Tamper-proof (PD30 Advanced series)

Connecting the remote teach wire to the power supply disables the push button and makes the sensor tamper-proof.

Diagnostic warning (PD30 Advanced series)

Two options are available: a 'dust output' that monitors the sensing performance and sends a signal if the sensor gets dirty, and a 'mute input' that allows a PLC to check the application for proper sensing operations.

Approvals

CE (EN60947-5-2)
cULus (UL508)



*) Only stainless steel

PD30 Series

PD30 Stainless Steel



The PD30 Stainless Steel sensor family is designed for use in harsh or hygienic environments. Built of excellent materials, the housing is resistant to high-pressure washdown, aggressive cleaning agents, and disinfectants. The sturdy stainless steel housing (AISI316L) together with high-quality plastic

materials like PEEK, PPSU, and PES sealings of FKM guarantee an outstanding mechanical resistance. IP69K and Ecolab certified, these stainless steel sensors superiorly meet the demands of the food and beverage industry.

PD30 Advanced



Sensitivity adjustment is accessible and highly flexible due to the teach-in and remote teach functions offered by the PD30 Advanced sensor series. Using the remote teach function, the operator can set the sensor from a PLC. Furthermore, the Advanced series fea-

tures dust warning and mute input, ensuring that sensor malfunctions are timely detected, and costly machine downtime is avoided. The Advanced series offers detection of transparent objects such as PET bottles.

PD30 Basic



The PD30 Basic sensor family presents a range of general-purpose sensors: economical, yet highly efficient! These sensors feature top or back potentiometer for sensitivity adjustment as well as background suppression


(BGS) based on a brand-new sensing principle which considerably increases the sensing distance (200 mm) and improves the detection accuracy of different colours.

General features and functions

Electrical and optical design

An optimized aspherical lens design allows for both a wide sensing angle and a long sensing range.

A PCB 'sandwich construction' together with microprocessor technology and a robust, functional analogue design provide optimized sensing and EMC performances, exceeding requirements from IEC.




PD30 is a sensor optimized for industrial environments!

PD30 Series

Miniature photoelectric sensors

PD30 Stainless Steel - features and functions

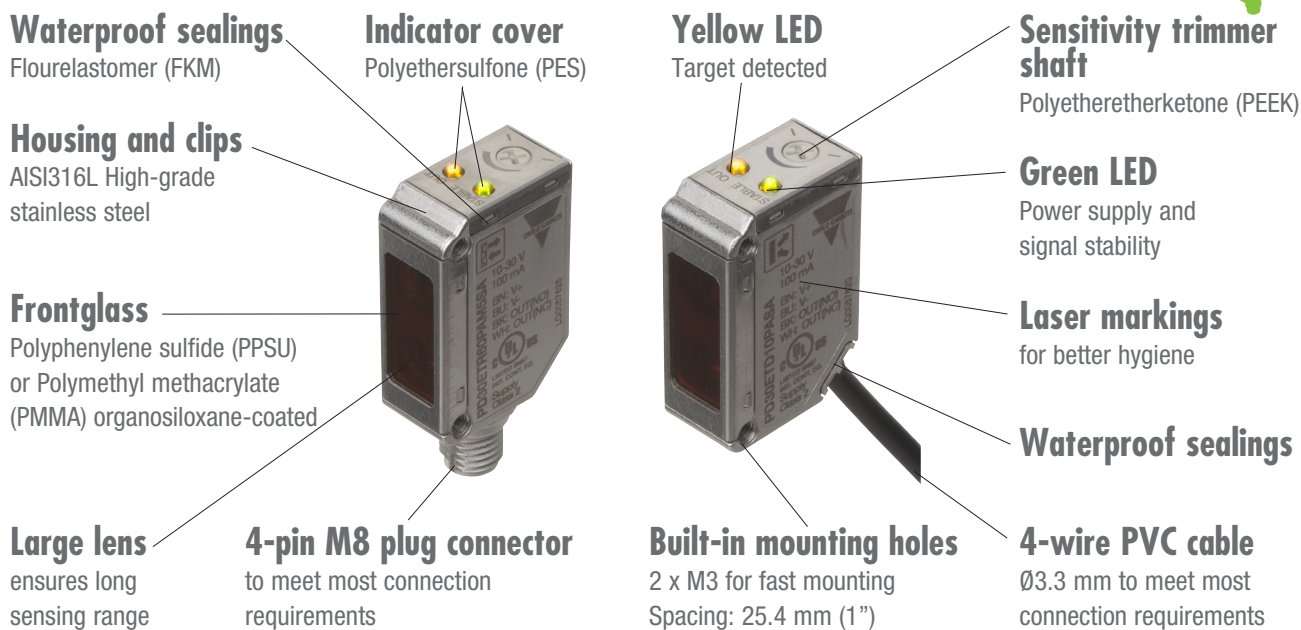

PD30 Stainless Steel - benefits



Highest degree of protection

The IP69K rating is for applications where high pressure and high temperature wash-down is used to sanitize equipment.

The PD30 Stainless steel housing withstands high-pressure cleaning processes with chemicals, and the sensor's object detection is continuous and reliable even in the harshest conditions. Certified by Ecolab.

Tolerates	Description of application	Concentration	Load duration	Result
Topax 56	Acidic foam cleaner for the food industry	5%	240 hours at 50°C	Passed
P3 Hypochloran	Chlorine-containing disinfectant for the food industry	1%	240 hours at 24°C	Passed
TOPAZ CL1	Alkaline and chlorine-containing foam cleaner for the food industry	5%	240 hours at 50°C	Passed
TOPAZ AC1	Acidic foam cleaner for the food industry	4%	240 hours at 50°C	Passed
TOPAZ MD3	Alkaline foam cleaner for the food industry	5%	240 hours at 50°C	Passed
P3-topactive OKTO	Acidic foam disinfectant for the food industry	1%	240 hours at 24°C	Passed


PD30 Stainless Steel - specifications

		Background suppression		Retro-reflective		Diffuse-reflective		Through-beam	
PD30ET..		Reflective	Reflective with IR light	Standard	With Polarization filter	Standard	Extremely Wide Angle	Receiver	Emitter
Cable	NPN	..B20NASA	..B20NAIS	..R60NASA	..P60NASA	..D10NASA	..D02NAWE	..T15NASA	..T15
	PNP	..B20PASA	..B20PAIS	..R60PASA	..P60PASA	..D10PASA	..D02PAWE	..T15PASA	
Plug	NPN	..B20NAM5SA	..B20NAM5IS	..R60NAM5SA	..P60NAM5SA	..D10NAM5SA	..D02NAM5WE	..T15NAM5SA	..T15M5
	PNP	..B20PAM5SA	..B20PAM5IS	..R60PAM5SA	..P60PAM5SA	..D10PAM5SA	..D02PAM5WE	..T15PAM5SA	
Rated operating distance (S _n)		200 mm (7.9 inches)		6 m ER4 reflector 4 m ER4060 reflector		1 m	200 mm	15 m (49.2 feet)	
Hysteresis (H)		≤ 10%		5% to 20%					-
Rated operational voltage		10 to 30 V DC (Ripple included)							
No load supply current (I _o)		≤ 40 mA @ U _B max. ≤ 20 mA @ U _B min.		≤ 25 mA @ U _B max.					≤ 20mA @ U _B max.
Output		Open collector, NPN or PNP by sensor type							-
Output function		N.O. (light switching) and N.C. (dark switching)							-
Output current		≤ 100 mA (max. load capacity 100 nF)							-
Minimum operational current (I _m)		≤ 0,5 mA							-
Off-State current (I _f)		≤ 100 µA							-
Voltage drop (U _d)		≤ 2 VDC @ (I _f) max.							-
Sensor protection		Shortcircuit (A), reverse polarity (B) and transients (C)							B + C
Response time		≤ 1.0 ms		≤ 0.5 ms				≤ 1.0 ms	-
Power on delay (t _p)		≤ 200 ms		≤ 30 ms				≤ 200 ms	≤ 30 ms
Led indications		Target detected (Yellow LED), Signal stability and Power ON (Green LED)							Power ON
Sensitivity control		Potentiometer, 210° electric, integrated in the receiver for through-beam type							
Degree of protection		IP68 @ 2 m and 20 h (IEC 60539; EN60947-1), IP69K (DIN40050-9)							
Ambient temperature		Operating: -25 to +60°C (-13 to +140°F) Storage: -40 to +70°C (-40 to +158°F)		Operating cable version: -25 to +60°C (-13 to +140°F) Operating plug version: -40 to +60°C (-40 to +140°F) Storage: -40 to +70°C (-40 to +158°F)					
Ambient humidity		Operating: 35 to 95 % RH, Storage: 35 to 95 % RH							
Ambient light		≤ 45 000 Lux	≤ 65 000 Lux			≤ 10 000 Lux		≤ 65 000 Lux	
CE marking		According to EN 60947-5-2							
Approvals		cULus (UL508, CSA C22.2), ECOLAB							
Installation category		III (IEC60664; EN60947-1)							
Pollution degree		3(EN60947-1)							
Vibration		10 to 150 Hz (1.0 mm/15G; (EN 60068-2-6) in X,Y and Z direction							
Shock		30g /11 ms. 6 positive and 6 negative in X,Y and Z direction							
Light source		617 nm	850 nm		625 nm	617 nm		-	850 nm
Light type		Red modulated	Infrared modulated		Red modulated			-	Infrared modulated
Material		Body: Stainless steel, AISI316L; Frontglass: Polyphenylene sulfide (PPSU) or Polymethyl methacrylate (PMMA) organosiloxane-coated; Trimmer shaft: Polyetheretherketone (PEEK)							
Cable		PVC, black, 2 m, 4 x 0.14mm ² , Ø=3.3 mm							
Connector		4-pin M8, male							
Dimensions		11 x 31.5 x 21 mm							
Weight incl. packaging		Cable version ≤ 100 g, Plug version ≤ 65 g							
Accessories (to be purchased separately)		Mounting bracket: APD30-MB1 or APD30-MB2 Connectors: CO..54NF... series							

PD30 Series

Miniature photoelectric sensors

PD30 Advanced - features and functions

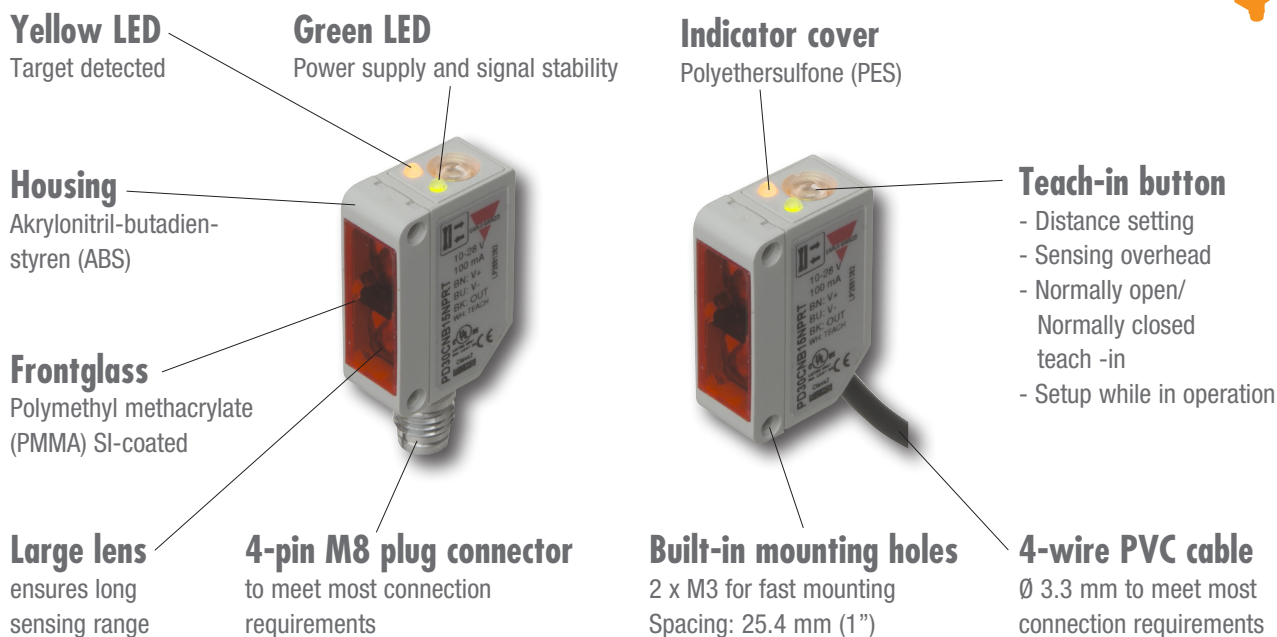


PD30 Advanced - benefits

Mute function (sensor blanking)

When more than one set of through-beam sensors are mounted close to each other, mutual interference might occur. Controlling the mute function - for instance from a PLC - can form a multiplex system where only one set of sensors is active at a time and


neighbouring interference is avoided. The mute function is also used to check the sensor for malfunctions or disconnections. If the emitter is turned on and off periodically, any malfunction will be detected as early as possible and costly breakdowns are prevented.

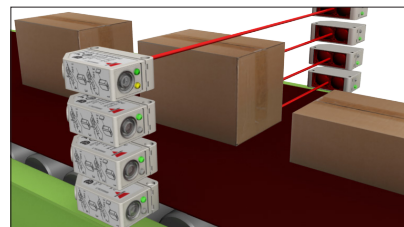

Half mute function (> 3 sec.)

When manually aligned sensors are used over a long distance, condensation or dust can cause false signals. Activating the half mute function (> 3 sec.) will set the


emitter at half power. Aligning the sensor at half power ensures enough energy to make the sensor function properly when switching back to full power.

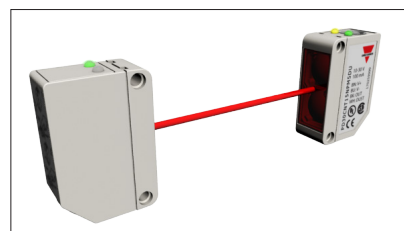

Dust alarm output

To prevent downtime of machinery, sensors have to be kept clean when used in dirty or dusty environments. The sensor will send an alarm signal over the dust output if it receives a low-


level signal for more than 20 ms. As a result, operators will know exactly when to clean the sensor, and sensors are cleaned only when necessary.

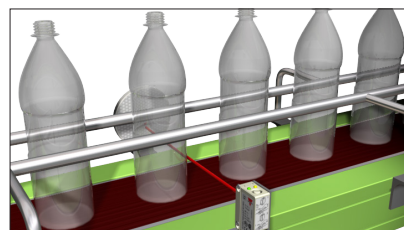

Remote teaching

Detection of diverse objects may require frequent modification of the sensor's settings such as distance and sensing overheads. A PLC connected to the remote teach input enables the

operator to change the sensor's settings while in operation. The teaching procedure is identical to the one used for manual teaching via the teach button.

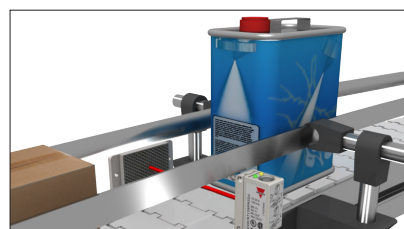

PD30 Advanced - specifications

			Diffuse-reflective		Retro-reflective			Through-beam			
PD30CN..			Background suppression	Energetic	Standard	With Polarization filter	For Tranparent Objects	Receiver	Emitter		
Cable	NPN	Remote teach	..B15NPRT	..D10NPRT	..R06NPRT	..P06NPRT	..G02NPRT	..T15NPRT	-		
		Dust alarm	-	..D10NPDU	..R06NPDU	..P06NPDU	-	..T15NPDU	-		
		Mute function	-		..R06NPMU	..P06NPMU	..G02NPMU	-	..T15NMU		
	PNP	Remote teach	..B15PPRT	..D10PPRT	..R06PPRT	..P06PPRT	..G02PPRT	..T15PPRT	-		
		Dust alarm	-	..D10PPDU	..R06PPDU	..P06PPDU	-	..T15PPDU	-		
		Mute function	-	-	..R06PPMU	..P06PPMU	..G02PPMU	-	..T15PMU		
Plug	NPN	Remote teach	..B15NPM5RT	..D10NPM5RT	..R06NPM5RT	..P06NPM5RT	..G02NPM5RT	..T15NPM5RT	-		
		Dust alarm	-	..D10NPM5DU	..R06NPM5DU	..P06NPM5DU	-	..T15NPM5DU	-		
		Mute function	-	-	..R06NPM5MU	..P06NPM5MU	..G02NPM5MU	-	..T15NM5MU		
	PNP	Remote teach	..B15PPM5RT	..D10PPM5RT	..R06PPM5RT	..P06PPM5RT	..G02PPM5RT	..T15PPM5RT	-		
		Dust alarm	-	..D10PPM5DU	..R06PPM5DU	..P06PPM5DU	-	..T15PPM5DU	-		
		Mute function	-	-	..R06PPM5MU	..P06PPM5MU	..G02PPM5MU	-	..T15PM5MU		
Rated operating distance (S _n)			150 mm 5.9 inches	1 m 3.3 feet	6 m 9.8 feet	6 m 9.8 feet	2 m 6.6 feet	15 m 49.2 feet			
Hysteresis (H)			≤ 10%						-		
Rated operational voltage			10 to 30 V DC, Ripple P-P ≤ 10%								
No load supply current (I _o)			≤ 32 mA @ 24 V DC	≤ 30 mA @ 24 V DC				≤ 30mA	≤ 25mA		
Output			Open collector, NPN or PNP by sensor type						-		
Output function			N.O. (light switching) or N.C. (dark switching)						-		
Output current (I _e)			≤ 100 mA (max. Load capacity 100 nF)						-		
Minimum operational current			≤ 0,5 mA						-		
Off-State current (I _f)			≤ 100 µA						-		
Voltage drop (U _d)			≤ 2.5 V DC @ 100 mA						-		
Sensor protection			Shortcircuit (A), reverse polarity (B) and transients (C)						B + C		
Response time			≤ 0,5 mS						-		
Power on delay (t _p)			≤ 400 mS	≤ 300 mS							
Led indications			Target detected (Yellow LED), Signal stability and Power ON (Green LED)						Power ON		
Sensitivity control			Teach-In programming								
Degree of protection			IP67 (IEC 60529; 60947-1)								
Ambient temperature			-25 to +55°C (-13 to +131°F) no condensation, Storage -40 to +70°C (-40 to +158°F)								
Ambient humidity			35 to 85 % RH, storage: 35 to 85 % RH								
Ambient light			≤ 10.000 Lux								
CE marking			According to EN 60947-5-2								
Approvals			cULus (UL508, CSA C22.2)								
Installation category			III (IEC60664/60664A; 60947-1)								
Pollution degree			3(IEC60664/60664A; 60947-1)								
Vibration			10 to 150 Hz (1.0 mm/15G; IEC 60068-2-6) in X,Y and Z direction								
Shock			30G /11 mS. 3 positive and 3 negative in X,Y and Z direction								
Emitting light source			Red LED		Infrared LED		Red LED		-	Infrared LED	
Material			Body, ABS light grey; Frontglass, PMMA red; Trimmer shaft, POM dark grey								
Cable			PVC, black, 2 m, 4 x 0.14mm², Ø=3.3 mm								
Connector			4-pin M8								
Dimensions			10.8 x 20 x 30 mm								
Weight incl. packaging			Cable version ≤ 40 g, Plug version ≤ 10 g								
Accessories			Mounting bracket: APD30-MB1								
Accessories, additional			'Mounting bracket: APD30-MB2 Connectors: CONM54NF-... Types'								

PD30 Series

Miniature photoelectric sensors

PD30 Basic - features and functions



Yellow LED

Target detected

Green LED

Power supply and signal stability

Housing

Akrylonitril-butadien-styren (ABS)

Frontglass

Polymethyl methacrylate (PMMA) SI-coated

Large lens

ensures long sensing range

4-pin M8 plug connector

to meet most connection requirements

Built-in mounting holes

2 x M3 for fast mounting
Spacing: 25.4 mm (1")

Indicator cover

Polyethersulfone (PES)

Sensitivity shaft

Polyoxymethylen, acetal (POM)

Potentiometer

- Manual setting
- Larger adjustability
- Easily set distance
- Back or Top

4-wire PVC cable

Ø 3.3 mm to meet most connection requirements

PD30 Basic and Stainless Steel - new background suppression principle


The new PD30 Stainless Steel and BASIC background suppression sensor (BGS) is based on a brand-new sensing principle. This principle increases the sensing distance considerably (200 mm) and it improves the detection accuracy of different colours, suppressing the background even more efficiently.

This revolutionary sensing technology uses an Active Pixel Sensor (APS) CMOS array of 64 x 1 sensors, where each pixel represents a specific position. It takes advantage of the fact that

the reflected light hits the APS array at exactly the same position.

This way, the object's mass centre can be found regardless of the energy of the received light. Using this technology, grey, black and white objects are detected at almost exactly the same distance.

Furthermore, unlike traditional CCD arrays, the CMOS array benefits from being immune to the blooming effect - not letting the light bleed onto other pixels and disturbing the detection.

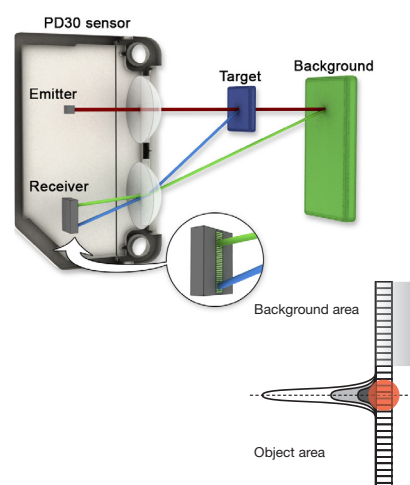

PD30 Basic - specifications

			Diffuse-reflective				Retro-reflective		Through-beam			
PD30C...			Background suppression		Energetic	Energetic Extreme Wide Angle	Standard	With Polarization filter	Receiver	Emitter		
Back Potentiometer	Cable	NPN	..NB20NASA	..NB20NAIS	..ND10NASA	-	..NR60NASA	..NP60NASA	..NT15NASA	..NT15		
		PNP	..NB20PASA	..NB20PAIS	..ND10PASA	-	..NR60PASA	..NP60PASA	..NT15PASA			
	Plug	NPN	..NB20NAM5SA	..NB20NAM5IS	..ND10NAM5SA	-	..NR60NAM5SA	..NP60NAM5SA	..NT15NAM5SA	..NT15M5		
		PNP	..NB20PAM5SA	..NB20PAM5IS	..ND10PAM5SA	-	..NR60PAM5SA	..NP60PAM5SA	..NT15PAM5SA			
Top Potentiometer	Cable	NPN	..TB20NASA	..TB20NAIS	..TD10NASA	..TD02NAWE	-	-	-	-		
		PNP	..TB20PASA	..TB20PAIS	..TD10PASA	..TD02PAWE	-	-	-	-		
Rated operating distance (S _n)			200 mm 7.9 inches		1 m 3.3 feet	200 mm 7.9 inches	6 m 9.8 feet	6 m 9.8 feet	15 m 49.2 feet			
Emitter angle @ 1/2 distance			±2.5°	±1.5°	±2.0°	±15°	±2.0°		-	±2.0°		
Hysteresis (H)			≤ 10%				5% to 20%		< 10%	-		
Rated operational voltage			10 to 30 V DC, Ripple P-P ≤ 10%									
No load supply current (I _s)			≤ 30 mA @ U _B min ≤ 20 mA @ U _B max		≤ 25 mA					≤ 20mA		
Output			Open collector, NPN or PNP by sensor type								-	
Output function			N.O. (light switching) and N.C. (dark switching)								-	
Output current (I _e)			≤ 100 mA (max. load capacity 100 nF)								-	
Minimum operational current			≤ 0,5 mA								-	
Off-State current (I _i)			≤ 100 µA								-	
Voltage drop (U _d)			≤ 2 V DC @ I _e max								-	
Sensor protection			Shortcircuit (A), reverse polarity (B) and transients (C)								B + C	
Response time			≤ 1 mS		≤ 0.5 mS				≤ 1 mS		-	
Power on delay (t _v)			≤ 200 mS									
Led indications			Target detected (Yellow LED), Signal stability and Power ON (Green LED)								Power ON	
Sensitivity control			Potentiometer, 210° electric, integrated in the receiver for through-beam type									
Degree of protection			IP67 (Iec 60529; 60947-1)									
Ambient temperature			-25 to +60 °C (-13 to +140 °F) no condensation, storage -40 to +70 °C (-40 to +158 °F)									
Ambient humidity			35 to 85 % RH, storage: 35 to 85 % RH									
Ambient light			≤ 10.000 Lux									
CE marking			According to EN 60947-5-2									
Approvals			cULus (UL508, CSA C22.2)									
Installation category			III (IEC60664/60664A; 60947-1)									
Pollution degree			3(IEC60664/60664A; 60947-1)									
Vibration			10 to 150 Hz (1.0 mm/15G; IEC 60068-2-6) in X,Y and Z direction									
Shock			30G /11 mS, 3 positive and 3 negative in X,Y and Z direction									
Emitting light source			Red Led	Infrared LED	Red LED	Infrared LED	Infrared LED	Red LED	-	Infrared LED		
Material			Body, ABS light grey; Frontglass, PMMA red; Trimmer shaft, POM dark grey									
Cable			Pcv, black, 2 m, 4 x 0.14mm², Ø=3.3 mm									
Connector			4-pin M8									
Dimensions			10.8 x 20 x 30 mm									
Weight incl. packaging			Cable version ≤ 50 g, Plug version ≤ 20 g									

PD30 Series


Miniature photoelectric sensors

Product types




Through-Beam

Separate emitter and receiver in a separate housing. A sensing distance of 15 m enables the sensor to be used in industrial settings where reliable detection is of primary importance. With a powerful infrared light beam, the sensor can see through various materials and determine whether content is present or not.

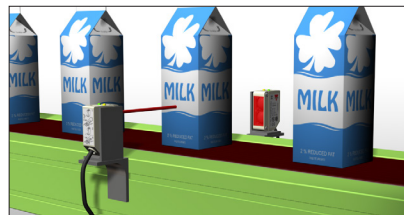

Retro-Reflective and Polarized Reflective

Separate emitter and receiver in one single housing. The signal from the emitter is sent to a reflector/passive device, and the need for wiring is reduced to one side of the application. The infrared retro-reflective sensor is primarily used in applications where the light beam must be invisible - for instance in entrance systems/doorways. The polarized reflective sensors are also able to detect objects with bright shiny surfaces.

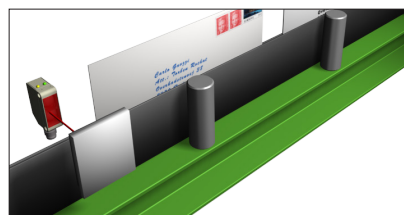


Diffuse-Reflective

Separate emitter and receiver in one single housing. A diffuse-reflective sensor without background suppression measures only energy returned from objects, which makes it ideal for structured surfaces because the sensor detects an average amount of light reflected.




Diffuse-Reflective - Extremely wide-angle

Separate emitter and receiver in one single housing. The diffuse-reflective sensor with an extremely wide detection angle can be used to detect PCBs despite large holes in the board, which means the PCB is registered as one PCB in the product cycle.

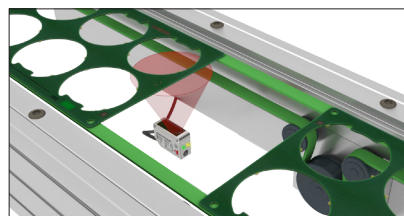


Background Suppression

A background suppression sensor detects an object using triangulation. Unlike a diffuse-reflective sensor, it is not colour-sensitive and is, therefore, capable of detecting a black object in front of, for instance, a white background.

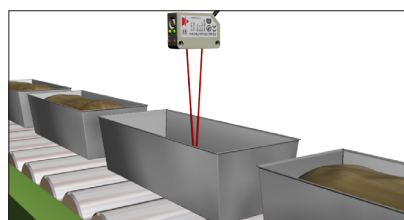

Retro-Reflective for transparent objects

Like retro-reflective sensors - but optimized to detect transparent objects such as PET bottles. The PD30 sensor features a long-range version suitable for supervising the jamming zone on both narrow and wide conveyor belts.

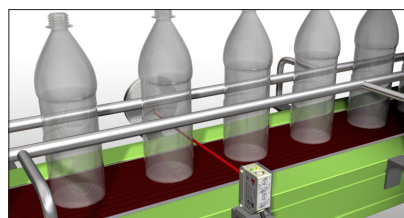


Applications

Meat, fish and poultry

The food industry's high demands on hygiene and cleanliness require equipment that can withstand daily washdown at high temperatures, high-pressure cleaning and harsh detergents.

Our solution

The PD30 Stainless steel sensors work perfectly even in the harshest environments. The high-quality stainless steel housing guarantees maximum mechanical resistance, and prescribed cleaning schedules are smoothly met without costly machine downtime.

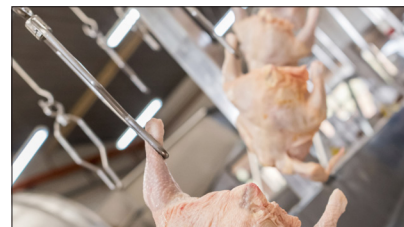

Dairy and juice production

Multi-coloured cartons used in the dairy and juice industries constitute a significant challenge to object detection in the manufacturing process. For example in the production lines of yoghurt cups, the presence of lids on the cups must be detected and it is essential that lids are not confused with yoghurt in the cups.

Our solution

Our PD30 background suppression sensor superiorly detects all colours on objects in the same distance from the sensor, and its durable design withstands daily cleaning processes including high-pressure water jets (IP69K) as well as aggressive cleaning agents.



Food handling and packaging

Typically, packaging lines and production lines in the food industry are not subject to the same stringent requirements. For convenience and simplicity, however, the trend is towards identical cleaning procedures throughout.

designed for wet as well as dry areas in the Food and Beverage industry. The stainless steel housing and high-end plastic materials guarantee maximum resistance against IP68K and Ecolab cleaning processes. As a consequence, cleaning routines and instructions are kept homogenous and clearly defined all over the plant.

Our solution

The PD30 Stainless steel sensors are




Printed circuit board manufacturing

In the PCB Industry considerable problems can arise when it comes to detecting black components on a PCB.

are detected when passing. Since background suppression is based on triangulation, component colours will not affect the detection. To protect operators on the assembly line from being blinded by an upwardly directed sensor, the infrared PD30 sensor is the obvious choice.

Our solution

The PD30 background suppression sensor is positioned below the PCBs which

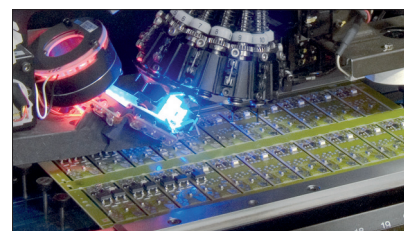

Coffee vending machines

In vending machines sensors often confuse cups and backgrounds such as a person drawing a cup of coffee.

the vending machine. Using the new BGS technology, it can detect cups in different colours equally well and, at the same time, ignore people and irrelevant background noise in front of the machine.

Our solution

The PD30 background suppression sensor enhances the overall ease of use of



OUR SALES NETWORK IN EUROPE

AUSTRIA

Carlo Gavazzi GmbH
Ketzergasse 374,
A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlogavazzi.at

BELGIUM

Carlo Gavazzi NV/SA
Mechelsesteenweg 311,
B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlogavazzi.be

DENMARK

Carlo Gavazzi Handel A/S
Over Hadstenvej 40,
DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

FINLAND

Carlo Gavazzi OY AB
Petaksentie 2-4,
FI-00661 Helsinki
Tel: +358 9 756 2000
Fax: +358 9 756 20010
myynti@gavazzi.fi

FRANCE

Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle Etoile,
F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlogavazzi.fr

GERMANY

Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

GREAT BRITAIN

Carlo Gavazzi UK Ltd
4.4 Frimley Business Park,
Frimley, Camberley, Surrey GU16 7SG
Tel: +44 1 276 854 110
Fax: +44 1 276 682 140
sales@carlogavazzi.co.uk

ITALY

Carlo Gavazzi SpA
Via Milano 13,
I-20020 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

NETHERLANDS

Carlo Gavazzi BV
Wijkmeerweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlogavazzi.nl

NORWAY

Carlo Gavazzi AS
Melkeveien 13,
N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
post@gavazzi.no

PORTUGAL

Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlogavazzi@carlogavazzi.pt

SPAIN

Carlo Gavazzi SA
Avda. Iparraguirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 431 6081
gavazzi@gavazzi.es

SWEDEN

Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlogavazzi.se

SWITZERLAND

Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 3,
CH-6312 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlogavazzi.ch

OUR SALES NETWORK IN THE AMERICAS

USA

Carlo Gavazzi Inc.
750 Hastings Lane,
Buffalo Grove, IL 60089, USA
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlogavazzi.com

CANADA

Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
Mississauga, ON L5N 6M6, Canada
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlogavazzi.com

MEXICO

Carlo Gavazzi Mexico S.A. de C.V.
Calle La Montaña no. 28, Fracc. Los Pastores
Naucalpan de Juárez, EDOMEX CP 53340
Tel & Fax: +52.55.5373.7042
mexicosales@carlogavazzi.com

BRAZIL

Carlo Gavazzi Automação Ltda.Av.
Francisco Matarazzo, 1752
Conj 2108 - Barra Funda - São Paulo/SP
Tel: +55 11 3052 0832
Fax: +55 11 3057 1753
info@carlogavazzi.com.br

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.
61 Tai Seng Avenue
#05-06 UE Print Media Hub
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980
info@carlogavazzi.com.sg

MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dana 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399
sales@gavazzi-asia.com

CHINA

Carlo Gavazzi Automation
(China) Co. Ltd.
Unit 2308, 23/F.,
News Building, Block 1, 1002
Middle Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300
sales@carlogavazzi.cn

HONG KONG

Carlo Gavazzi Automation
Hong Kong Ltd.
Unit 3 12/F Crown Industrial Bldg.,
106 How Ming St., Kwun Tong,
Kowloon, Hong Kong
Tel: +852 23041228
Fax: +852 23443689

OUR COMPETENCE CENTRES AND PRODUCTION SITES

DENMARK

Carlo Gavazzi Industri A/S
Hadsten

MALTA

Carlo Gavazzi Ltd
Zejtun

ITALY

Carlo Gavazzi Controls SpA
Belluno

LITHUANIA

Uab Carlo Gavazzi Industri Kaunas
Kaunas

CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.
Kunshan

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20020 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



CARLO GAVAZZI
Automation Components

Energy to Components!

www.gavazziautomation.com

